

片材 / 手机按键电晕处理机

SHEET/KEY-PRESS of MOBILE-PHONE CORONA TREATMENT



片材电晕处理机
Sheet Corona Treatment



手机按键处理机
Key-press of Mobile-phone Corona Treatment

主要特点

片材电晕处理机是对塑料片材、金属膜片材、纸张表面进行电晕处理的专用设备，被处理材料由输送带传送通过放电区域后表面的粘合力得到了提高，通过调整控制面板上的旋钮可改变传送带速度和电晕功率强度，以满足不同的处理要求。

Main Characteristics

sheet corona treatment the plastic material, metal film piece material, the surface of paper. The treated material trough the discharge area by the conveying belt, this can strengthen the penetration on the surface of material, it can change the strength of conveying belt speed and corona frequency by the button of the control panel to satisfy the different requirement .

输送带速度 Conveying Belt Speed:	0-20m/min
处理宽度 Treat Width:	1200mm
最大电晕功率 Corona Power(max):	8kw
被处理材料最小纵向尺寸 Treated Material Longitudinal Size:	200mm

主要特点

手机按键处理机可对类似于手机按键的塑料、橡胶制品进行连续的电晕处理，具有独特的放电电极，被处理材料无最小尺寸的限制。

Main Characteristics

Mobile button treater can continually treat the similar material like the plastic of mobile button, rubber product, it has unique discharge electrode, the treated material have no minirnal dimensional limit.

输送带速度 Conveying Belt Speed:	0-20m/min
放电间隙(max) Discharge Gap(max):	40mm
被处理材料最大高度 Treated Material Altitude(max):	38mm
最大处理宽度 Treat Width:	400mm
最大电晕功率 Corona Power(max):	3kw

南通三信塑胶装备科技股份有限公司

公司地址: 江苏省启东市台角工业区

网址: www.ntsaxin.com www.ntsaxin.cn

总机: 0513-83214154 传真: 0513-83214152

邮箱: ntsx@ntsaxin.com

NANTONG SANXIN PLASTICS EQUIPMENT TECHNOLOGY CO.,LTD

Address: Taijiao Industrial Zone, Qidong City, Jiangsu Province, China

Website: www.ntsaxin.com www.ntsaxin.cn

Tel: 0086-513-83214154 Fax: 0086-513-83214152 Email: ntsx@ntsaxin.com

电线电缆 / 杯子专用电晕处理机

THE CORONA TREATMENT SPECIAL FOR WIRE AND CABLE / CUP



电线电缆专用电晕处理机
The Corona Treatment Special For Wire And Cable



杯子电晕处理机
Cup Corona Treatment

主要特点

- ◆ 输入电压：单相220V 50Hz
- ◆ 输出功率 (Max) : 2kw
- ◆ 处理电缆直径 (Max) : Φ 15mm
- ◆ 采用IGBT为功率器件可靠性高。
- ◆ 采用特种陶瓷作为放电电极。
- ◆ 提高电线电缆印刷牢度。

Main Characteristics


- ◆ Input voltage: 220V, 50Hz
- ◆ Output power(max): 2kw
- ◆ Diameter of cable(max): Φ 15mm
- ◆ It adopts power switching IGBT module, and is high reliability.
- ◆ It adopts the special ceramic as the electrode to discharge.
- ◆ Improve the strength of wire and cable for printing

主要特点

- ◆ 输入电压 (Max) : AC220V 50Hz
- ◆ 输入电流 (Max) : 4A
- ◆ 电极电压：10KV
- ◆ 输出功率：0-1KW 可调
- ◆ 最大处理速度：500/Min (Max)
- ◆ 应用范围：各种纸杯、塑料杯、塑料桶的表面处理

Main Characteristics

- ◆ Input voltage (max): AC220V 50Hz
- ◆ Input current (max): 4A
- ◆ The voltage of electrode: 10KV
- ◆ Output power: 0-1KW adjustable
- ◆ Working speed (max): 500/min
- ◆ To treating the surface of the paper cup, plastic cup and plastic barrel.

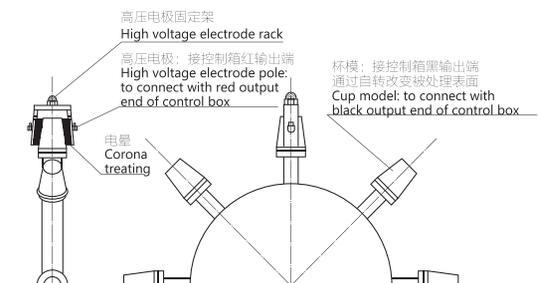

杯子处理机原理示意图
The map of exhibition for cup corona treatment

南通三信塑胶装备科技股份有限公司

公司地址：江苏省启东市台角工业区
网址：www.ntsaxin.com www.ntsaxin.cn
总机：0513-83214154 传真：0513-83214152
邮箱：ntsax@ntsaxin.com

NANTONG SANXIN PLASTICS EQUIPMENT TECHNOLOGY CO.,LTD

Address:Taijiao Industrial Zone, Qidong City, Jiangsu Province, China

Website: www.ntsaxin.com www.ntsaxin.cn

Tel: 0086-513-83214154 Fax: 0086-513-83214152 Email: ntsax@ntsaxin.com